

## DPAC2U SERIES PARALLELING PANEL FOR INV2500 SERIES INVERTERS

### DESCRIPTION


The DPAC2U paralleling panel provides a means to simply combine together the AC outputs from up to four of the INV2500 Series Inverter shelves and provide a single bulk AC feed to the load of up to 20kVA.

This 2U high panel attaches to the rear of the top or bottom inverter shelf using special mounting brackets. When attached to the top shelf it occupies 2U above the inverter stack whereas when attached to the bottom shelf it occupies 2U below the inverter stack. In both cases the same space at the front of the rack can be utilized for other equipment.

### SAFETY STANDARDS

UL60950-1  
CSA22.2, No. 60950-1  
EN60950-1

### TWO-YEAR WARRANTY

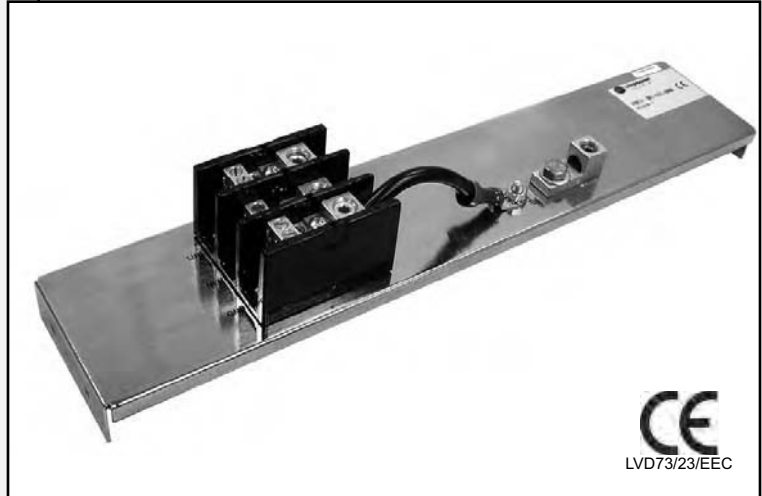

### SPECIFICATIONS

#### ELECTRICAL RATINGS

Operating Voltage ..... nominal 115VAC or 230VAC  
Maximum Voltage ..... 264VAC  
Maximum Current ..... 175A

#### ENVIRONMENTAL



Operating Temp. Range ..... -40°C to +70°C  
Humidity ..... 0% to 95%, Non-Condensing

#### PHYSICAL SPECIFICATIONS

Panel Material ..... Steel  
Dimensions ..... 2U H x 19" W  
Weight ..... 2.2 lbs. (1 kg.)

### ORDER CODE: DPAC2U

### CONNECTIONS DETAILS

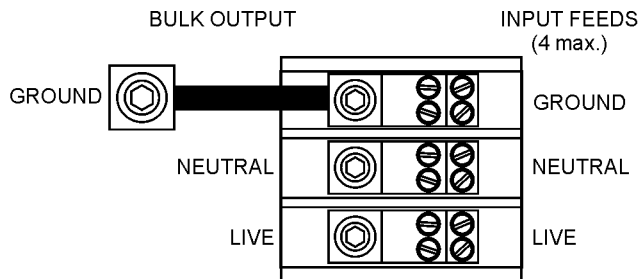

#### NOTES

1. Input terminal wire range #6 - #14AWG.
2. Output terminal wire range #2 - #14AWG.
3. Frame ground terminal wire range #2 - #14AWG.

[www.unipowertelecom.com](http://www.unipowertelecom.com)

DPAC2u-ds-revA-01/24/08